


# Baseus

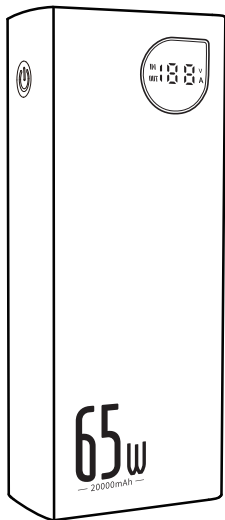

## Baseus Adaman Metal Digital Display Quick Charge Power Bank 65W 20000mAh User Manual

### Statement

Thank you very much for choosing this product! Please read the user manual carefully before using this product. All information in this manual may be changed without notice. The company reserves the right to change the information at any time without additional information.

### 1. Product Parameter

Name: Power Bank  
Model No.: PPADM65  
Material: Aluminum alloy+ABS  
Battery type: Polymer battery  
Battery capacity: 5000mAh/14.8V/74Wh  
Rated capacity: 12000mAh(5V-6A)  
Energy conversion rate: ≥75%

#### Input:

Micro: 5V=2A, 9V=2A

Type-C: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3A

#### Output:

USB1: 4.5V=5A (SCP), 5V=4.5A (SCP), 5V=3A, 9V=3A, 12V=2.5A

USB2: 5V=3A, 9V=3A, 12V=2.5A

Type-C: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A

USB1+USB2: 5V=3A

Type-C+USB1/USB2: 45W+18W

5V Total Output: 5V=6A

Product size: 154\*65\*27mm


Product weight: 450g

\*The above data are measured by the Baseus laboratory, the actual use will be slightly different depending on the specific circumstances

### 2. Packing List

- |                   |    |
|-------------------|----|
| 1. Power Bank     | *1 |
| 2. User Manual    | *1 |
| 3. Warranty card  | *1 |
| 4. Charging cable | *1 |

### 3. Product Diagram

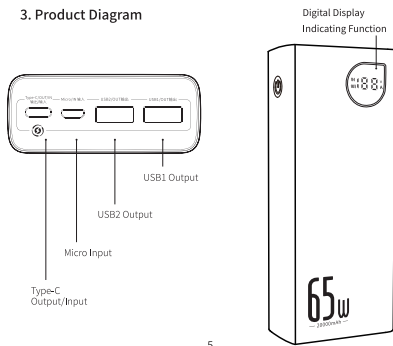

### 4. Product description

This product is a super charging mobile power bank supporting 5A high current and maximum output power up to 65W. It supports two quick charging modes of SCP and FCP of Huawei. It also conforms to PPS specifications. Support IP12 20W PD quick charge. It is compatible with PD3.0, QC4+, QC3.0, Samsung AFC and other fast charging modes. Overtemperature, short circuit protection and other multiple security protection circuits.

### 5. Instructions for the use of products

#### Key operation instructions

- In the no-load state, the button displays the current power at one time.
- Under the load state, the button displays the current power once, the current voltage again and the current current again.
- When multiple devices output at the same time, display the total output current of multiple devices.
- When the input and output side, only the input voltage and current are displayed.

#### Charging operation instructions

##### Charging your mobile phones or other digital devices by using Adaman Metal Power Bank

- Check and make sure the charging voltage of your digital products is consistent with the voltage output of Adaman Metal Power Bank
- Select and use the original charging cable of your digital products, connect one end of it with your digital product, and the other end with the output port of Adaman Metal Power Bank, Adaman Metal Power Bank then automatically starts to charge your digital product, with the LED indicator lit all the time.

##### Charging Adaman Metal Power Bank by using a AC charger or PC USB port

- Select and use the original USB cable, connect the Micro or Type-C port with the Micro or Type-C input port of Adaman Metal Power Bank.
- Connect the USB or Type-C connector with the USB port of AC charger or PC USB port, and the LED indicator begins to flash, that is charging Adaman Metal Power Bank. While full charge the indicators become lit constantly.

### 6. Use environment

Use ambient temperature: non-tropical area below 0°C to 40 °C  
Storage ambient temperatures: 0 °C to 40 °C degrees Celsius

### 7. Safety warning instructions

- Due to the existence of conversion efficiency, so rated output capacity is less than battery capacity.
- When you need to check the power, press the power button once and the LED indicator lights up to show the current power. In the connectionless state, the power will automatically sleep after about 30 seconds.
- Please charge your power bank periodically (at least one time with 5 months recommended) in order to maintain its long service life.
- Improper use of the product can easily cause damage to the product or may endanger personal and property safety.
- Consumer shall be liable for any personal and property damage resulted from their improper use against the user manual or ignoring the warning, to which our company will not bear any legal liability.
- Disintegration of this product by non-professionals is strictly prohibited.
- Use of household appliances or loads in excess of the output current of this product shall be avoided (no output due to circuit protection).
- Intense physical actions including knocking, throwing, trampling on and squeezing, etc. shall be avoided.

### 8. Statement on Toxic and Hazardous Substances in Electronic Information Products

Part Description	Toxic or hazardous substances and elements					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent chromium (Cr VI)	Polybrominated biphenyls (PBB)	Polybrominated diphenyl ethers (PBDE)
PCB	X	○	○	○	○	○
Electrode	○	○	○	○	○	○
Battery	X	○	○	○	○	○
Casing	○	○	○	○	○	○

This form is compiled in accordance with SJ/T 11364.

O: It indicates that the content of the toxic and harmful substance in all homogeneous materials of the component is below the limit specified in GB/T 26572 standard.

X: The content of toxic and harmful substances in at least one homogeneous material of this part exceeds the limit stipulated in GB/T 26572 standard.

This product complies with EU RoHS 2.0 Directive(2011/65/EU)

The information provided in this form is based on the data provided by the supplier and in line with the detection result of RoHS environmental requirements.

The 5-year icon refers to the "effective life of environmental protection"; not the product quality assurance period. Electronic products all contain toxic and harmful substances such as lead, mercury and cadmium. Once they are overused, toxic and harmful substances may leak or mutate, cause pollution to the environment, or cause serious damage to people and property. The term of "environmental protection use" means that all electronic products will be required to use within this effective period. We will no longer be responsible for the quality of the products due to the safety risks that arise after the safe use period.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:  
- Reorient or relocate the receiving antenna.  
- Increase the separation between the equipment and receiver.  
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.  
- Consult the dealer or an experienced radio/TV technician for help.



This equipment complies with the provisions of Directive 2012/19/EU and Directive 2006/66/EU. It is strictly forbidden to dispose of this equipment with ordinary trash; it must be recycled. This symbol indicates that the product shall not be treated as regular domestic trash, and must be delivered to a recycling center that is capable of recycling electronic and electrical equipment.

It is hereby declared that PPADM65, a product model of Shenzhen Times Innovation Technology Co., Ltd., complies with the provisions of Directive 2014/30/EU, Directive 2011/65/EU. The full text of the EC Declaration of Conformity can be found on the following website: [www.baseus.com](http://www.baseus.com)



Please follow the above safety instructions otherwise it will cause fire, electric shock, damage or other damage.



Manufacturer: Shenzhen Times Innovation Technology Co., Ltd.  
Add: 5th Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtuo Community, Bantian Street, Longgang District, Shenzhen  
Executive Standard: GB/T 35590-2017

Hotline: +86-4000-712-711 Website: [www.baseus.com](http://www.baseus.com)

PB2961Z  
Designed by Baseus  
Made in China