




Model : PD200X

Maono 麦克风公众号  
如需要帮助，请扫描二维码。





To get technical support, please scan the QR code



Final device: Information and data contained in this manual are subject to change without notice in advance.

We frequently update product firmware to improve user experiences and performance. The status display and operations may be slightly different among different firmware versions. For latest user manuals, please access on <https://www.maono.com>.

Model : PD200X

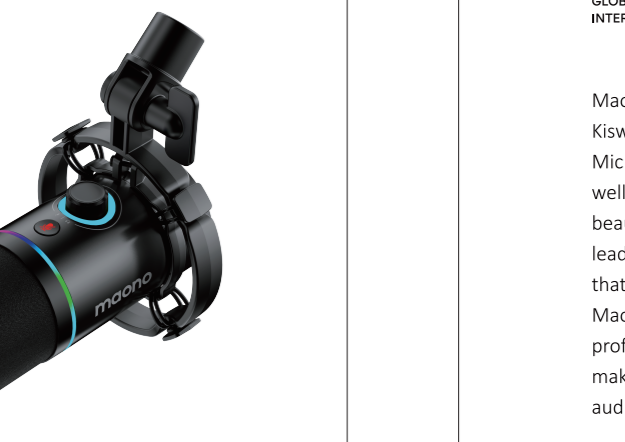

**User Manual**  
USB/XLR Podcast Dynamic Microphone




Maono [ˈmɒnoʊ], meaning "vision" in Kiswahili, is the Global Best Selling Internet Microphone Brand that products are sold well in 153 countries worldwide. With the beautiful vision of becoming a global leading brand of Internet audio products that deliver a pleasant sound experience, Maono is always working with audio professionals, influencers, and users, to make the world's best microphones and audio products.

## CONTENTS


English ..... 01-15

### Packing List

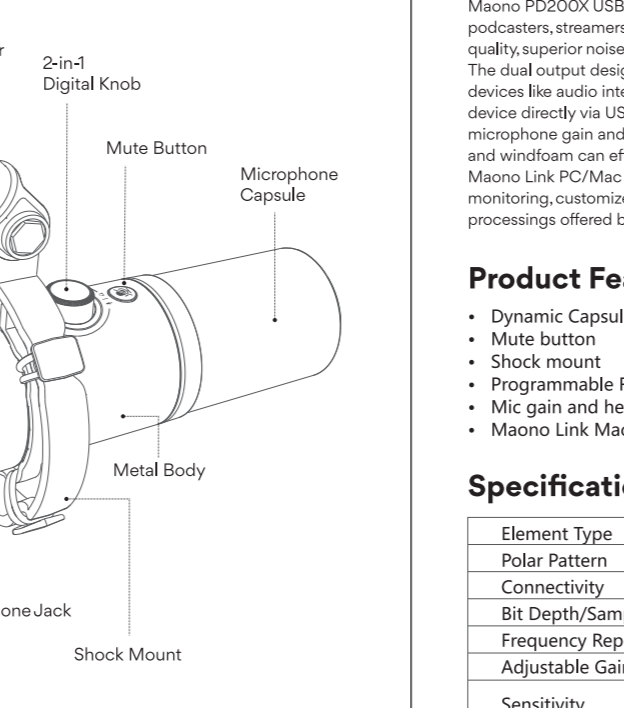

- USB/XLR Dynamic Microphone x1
- 5/8" to 3/8" Thread Adapter x1
- USB A&C to USB C 2-in-1 Cable x1
- User Manual x1

### Product Overview

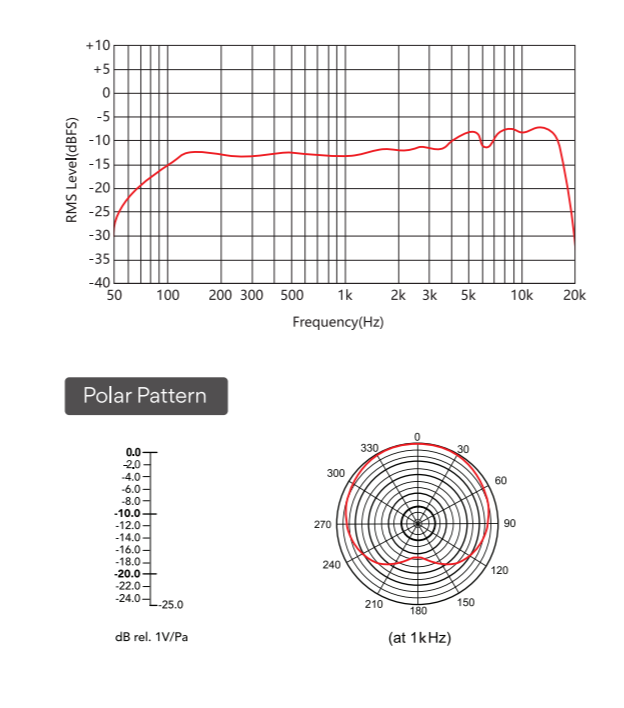

- Stand Adapter
- 2-in-1 Digital Knob
- Mute Button
- Microphone Capsule
- XLR Output
- 3.5mm Headphone Jack
- RGB Switch
- Shock Mount
- USB-C
- Metal Body

### Product Description

Maono PD200X USB/XLR podcast dynamic microphone is designed for podcasters, streamers, and content creators. It has outstanding audio quality, superior noise isolation performance, and is packed with features. The dual output design allows it to be used with professional audio devices like audio interfaces via XLR, or connect to a computer or mobile device directly via USB-C. The unique 2-in-1 knob controls both microphone gain and headphone volume. The custom-built shockmount and windfoam can effectively reduce unwanted noises. With the free Maono Link PC/Mac Desktop App, you can also control real-time monitoring, customize RGB lighting, and take advantage of the audio processings offered by built-in hardware DSP.


### Product Features

- Dynamic Capsule
- Mute button
- Shock mount
- Programmable RGB lights
- Mic gain and headphone volume control
- Maono Link Mac/PC and Android App
- Cardioid polar pattern
- All metal body
- Built-in windfoam


### Specification

Element Type	Dynamic
Polar Pattern	Cardioid
Connectivity	XLR & USB-C
Bit Depth/Sample Rate	24-bit/48kHz
Frequency Response	40Hz-16kHz
Adjustable Gain Range	0 to +42dB
Sensitivity	XLR: -52dBV/Pa USB: -10.5dBFS/Pa (Max)
Max. SPL	>130dB SPL

### Frequency Response

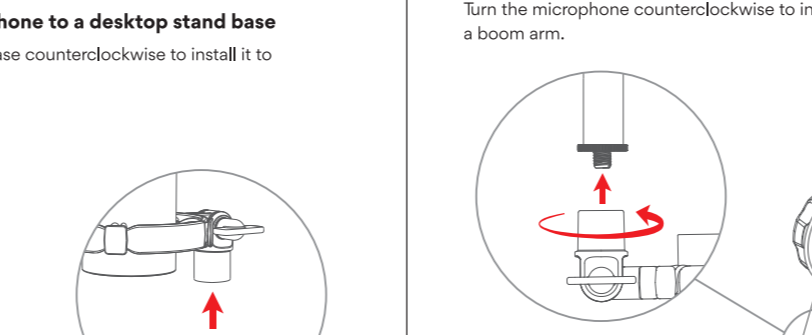


### Polar Pattern

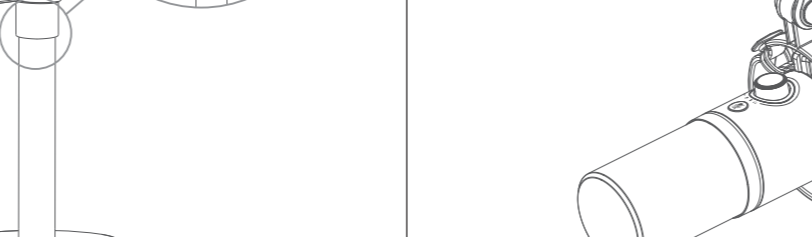

### Product installation and usage


**Attach the microphone to a desktop stand base**  
Turn the table stand base counterclockwise to install it to microphone.

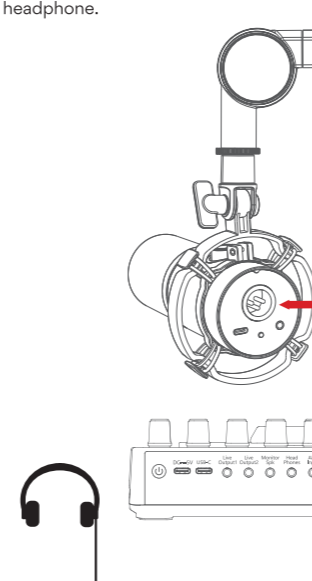

To attach to some microphone stands and boom arms, you may need to use the included thread adapter.

### Attach the microphone to a boom arm


Turn the microphone counterclockwise to install microphone to a boom arm.



To attach to some microphone stands and boom arms, you may need to use the included thread adapter.

### Connect the microphone to computers


Connect the microphone to a computer using a USB-C cable. Connect your headphones to the 3.5mm headphone jack on the microphone if you want to take advantages of real-time monitoring.



Your device is ready to use. Device driver software installed successfully.

### Connect the microphone to an audio interface

Connect the microphone to an audio interface with the XLR-XLR cable. Connect headphone to the audio interface headphone interface if you need to use a headphone.



Your device is ready to use. Device driver software installed successfully.

### Buttons functions


#### • Mute button

Control	Operation	Function	Indicator
	Press	Mute	
		Unmute	


Note: Muting function is not available in XLR mode.

#### • 2-in-1 Knob Control

Note: Please use external power adapter when connecting microphones to iOS devices.



Short press the button to switch the RGB lights from static color mode and dynamic mode. Long hold 2 seconds to quickly turn off lights (Short press the button to turn on lights)




Control	Color	Operation	Function	Indicator
		Rotate	Increase Mic Gain	
		Rotate	Decrease Mic Gain	
		Short Press	Mode Switch	
		Rotate	Increase Headphone Volume	
		Rotate	Decrease Headphone Volume	

### • RGB Switch


Short press the button to switch the RGB lights from static color mode and dynamic mode. Long hold 2 seconds to quickly turn off lights (Short press the button to turn on lights)




Short press the button to switch the RGB lights from static color mode and dynamic mode. Long hold 2 seconds to quickly turn off lights (Short press the button to turn on lights)




### Windows Setup Guide




### Microphone level setting




### macOS Setup Guide




### Microphone level setting

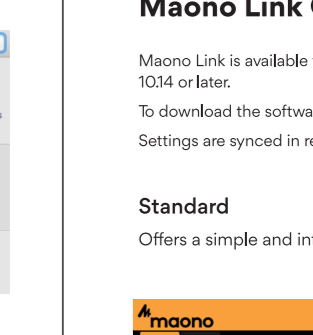

### macOS Setup Guide



### Microphone level setting

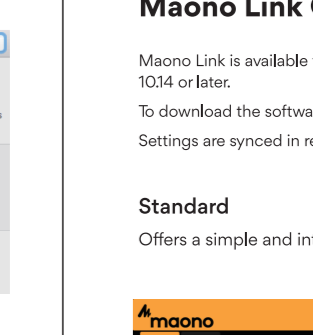


### Maono Link Guide

Maono Link is available for both Windows 7 or later and macOS 10.14 or later. To download the software, please go to <https://www.maono.com>. Settings are synced in real time between hardware and software.

### Standard

Offers a simple and intuitive set of audio settings.

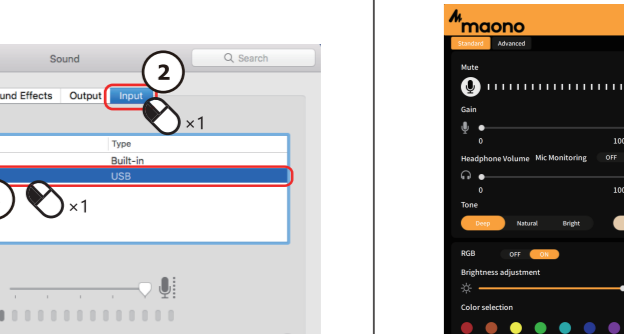

### Advanced

Offers more advanced audio settings. You can use a combination of EQ, limiter, and compressor to customize your voice. You can go to the setting menu from the top right corner to check software and firmware updates.

